

POWERLINK EP Perkins Series Diesel Generator with Leroy Somer Alternator



Model: **PP15S-AU**
 Frequency: **50Hz**
 Fuel type: **Diesel**
 Powered by: **PERKINS SERIES**

240V-50Hz-1Phase

- Powerful heavy-duty Perkins industrial diesel and low emissions engine
- Intelligent control - Manual & Remote start
- Weather protective and sound attenuated enclosure
- Comprehensive warranty and service

TECHNICAL SPECIFICATIONS


Model	PP15S-AU			
Power(ESP)	kVA/kw	17/13		
Power(PRP)	kVA/kw	15/12		
Voltage	V	240		
Fuel Consumption	Litre/hour	Fuel consumption100% (of the Prime Power)	4.1L/h	
		Fuel consumption75% (of the Prime Power)	3.6 L/h	
		Fuel consumption50% (of the Prime Power)	3.1L/h	
		Fuel consumption25% (of the Prime Power)	2.5 L/h	
Fuel Tank Capacity	Litre	100		
Noise Level	dB(A)@7m	66.7dBA		
Dimensions and Weight	Length	Width	Height	Weight
	1932 mm	878 mm	1208 mm	740 kg

ENGINE SPECIFICATIONS

Manufacturer	Perkins
Model	403A-15G2
Engine Speed Rated	1500 RPM
Cylinder /Arrangement	3
Displacement	1496 L
Bore and Stroke	84 mm × 90 mm
Compression Ratio	23.3
Intake Resistance	≤6.4kPa
Governor Type	Indirect Injection
Total Oil Capacity w/Filters	6.0 L
Coolant Capacity	6.0 L

ALTERNATOR SPECIFICATIONS

Manufacturer	Leroy Somer LSA42.3VS1
Phase	1
Power Factor	1
Bearing	1
Exciter type	Brushless
Insulation : Class , temperature rise	H
Degree of protection	IP23
AVR model	R250
Altitude	≤1000m
Winding Pitch	2/3
Overspeed	2250rpm

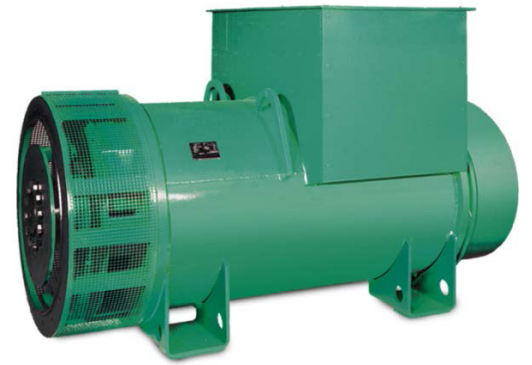

AIR SYSTEM

Engine Air Flow	5.3m ³ /min(50Hz)
-----------------	------------------------------

Note: All data sheets are for reference only and subject to change without prior notice.

CONTROL PANEL

Powerlink	PLC920
-----------	--------

KEY FEATURES

- Standard Control Function
- Manual Engine Control Module
- Low Oil Pressure
- High Engine Temperature
- Auxiliary Shutdown
- Over Speed Protection
- Protection Hold-off Timer
- Charge Failure Warning

