




SIGENERGY



Sigen Energy Controller

3.0 – 6.0 kW Single Phase

- EMS inside for precise control
- On & off-grid compatibility
- Multi-source black start
- DC/AC ratio up to 2
- IP66 system protection rating

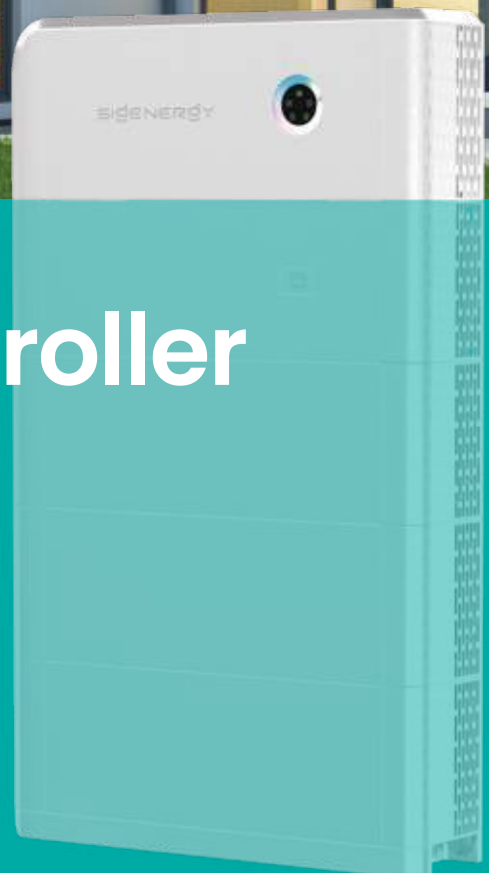

www.sigenenergy.com

Sigen Energy Controller 3.0–6.0 kW Single Phase

SigenStor EC	3.0 SP	3.6 SP	4.0 SP	4.6 SP	5.0 SP	6.0 SP	Units
DC Input (from PV)							
Max. PV power	6000	7360	8000	9200	10000	12000	W
Max. DC input voltage			600				V
Nominal DC input voltage			350				V
Start-up voltage			100				V
MPPT voltage range			50 ~ 550				V
Number of MPP. trackers			2				
Number of PV strings per MPPT			1				
Max. input current per MPPT			16				A
Max. short-circuit current per MPPT			20				A
AC Output (on-grid)							
Nominal output power	3000	3680	4000	4600	5000	6000	W
Max. output apparent power	3300	3680	4400	5000	5500	6600	VA
Nominal output current	13.6	16.0	18.2	20.9	22.7	27.3	A
Max. output current	15.0	16.0	20.0	22.7	25.0	30.0	A
Nominal output voltage			220 / 230 / 240				V
Nominal grid frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total current harmonic distortion			THDi < 2%				
Efficiency							
Max. efficiency			98.0%				
European efficiency	97.0%	97.1%	97.2%	97.3%	97.4%	97.4%	
AC Output (backup)							
Peak output power (10 seconds)	4500	5520	6000	6900	7500	9000	W
Nominal output voltage			220 / 230 / 240				V
Nominal output frequency			50 / 60				Hz
Power factor			0.8 leading ~ 0.8 lagging				
Total voltage harmonic distortion			THDv < 2%				
Disruption time of backup switch ¹			0				ms
Battery Connection							
Battery module models			SigenStor BAT 5.0 / 8.0				
Number of modules per controller			1 ~ 6				pcs
Battery module voltage range			300 ~ 600				V
Protection							
Safety protection feature	DC reverse polarity protection, Insulation monitoring, Residual current monitoring, Arc fault circuit interrupter ² , AC overcurrent/overvoltage/short-circuit protection. Type II DC/AC surge protection, Anti-islanding protection						

General Data

Dimensions (W / H / D)	700 / 300 / 245	mm
Weight	18	kg
Storage temperature range	-40 ~ 70	°C
Operating temperature range	-30 ~ 60	°C
Relative humidity range	0% ~ 95%	
Max. operating altitude	4000	m
Cooling	Natural convection	
System ingress protection rating	IP66	
Communication	WLAN / Fast Ethernet / RS485 / Sigen CommMod (4G/3G/2G)	

Standard Compliance

Standard ³	IEC/EN 62109-1, IEC/EN 62109-2, IEC/EN 62477, IEC/EN 61000-6-1, IEC/EN 61000-6-2
1.	This refers to the load-side disruption time, to achieve this functionality Sigen Energy Gateway needs to be used together with Sigen Energy Controller and Sigen Battery. Test conditions: In the open-circuit state of the power grid, the nominal power of the Sigen Energy Controller is higher than the total power of the home loads.
2.	This is an optional feature only supported in certain models, please contact Sigenenergy for more information.
3.	For all standards refer to the certificates category in the Sigenenergy website.

Disclaimer: The information in this file is provided on an "as is" basis. To the fullest extent permitted by law, Sigenenergy Technology Co., Ltd. excludes all representations and warranties relating to this file and its contents or which is or may be provided by any affiliates or any other third party, including in relation to any inaccuracies or omissions in this file.