


PHONO


QUASAR CLEAR 475W N-BC

Uncompromising Power

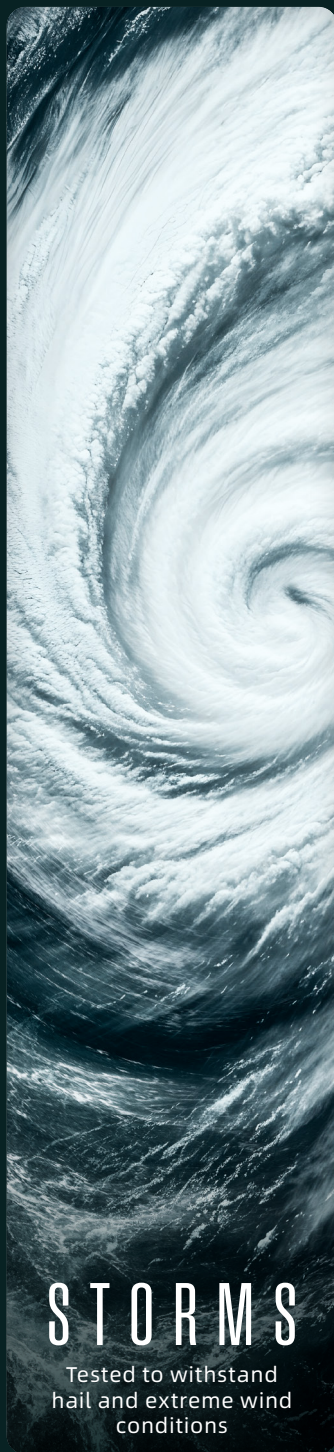


STORMS

Tested to withstand
hail and extreme wind
conditions

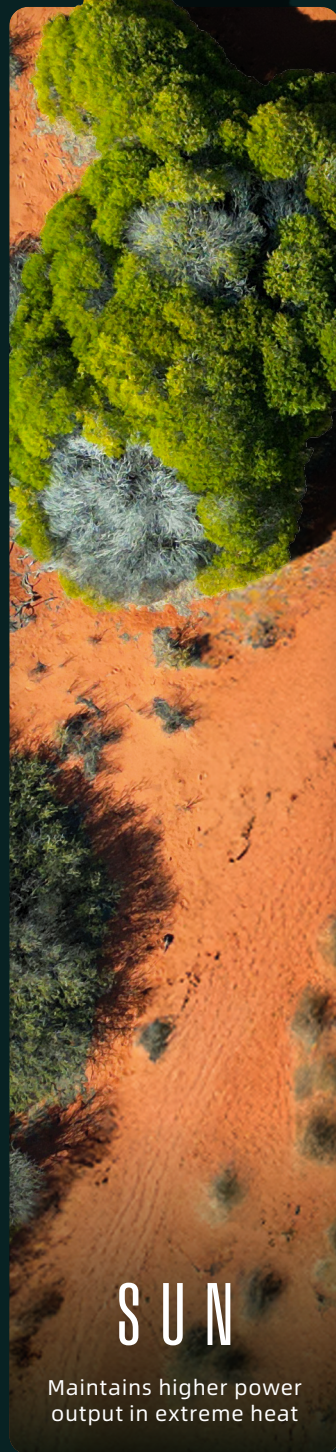


SUN

Maintains higher power
output in extreme heat

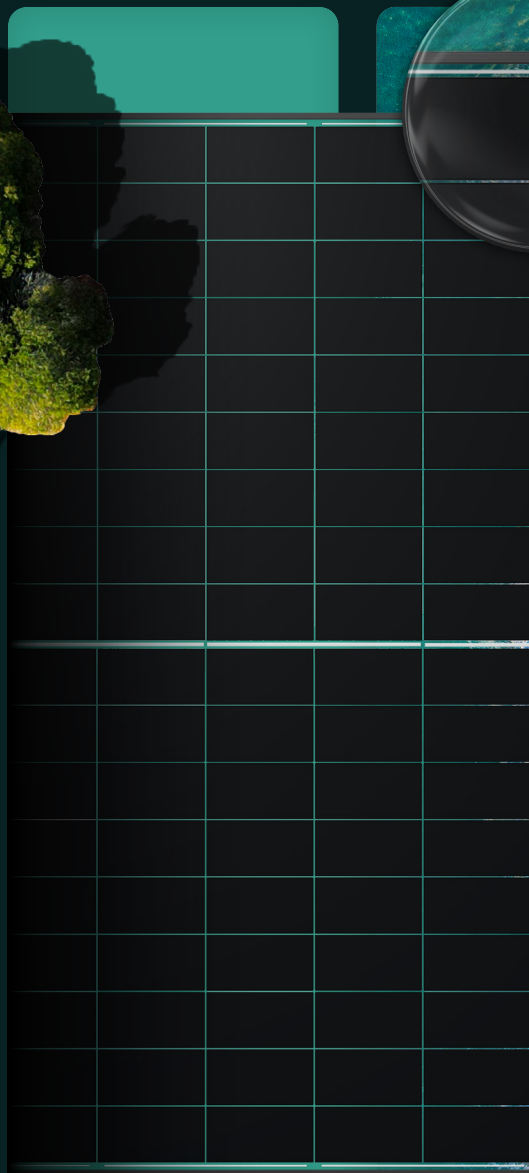


SHADE

Enhanced Performance
in Partial Shade

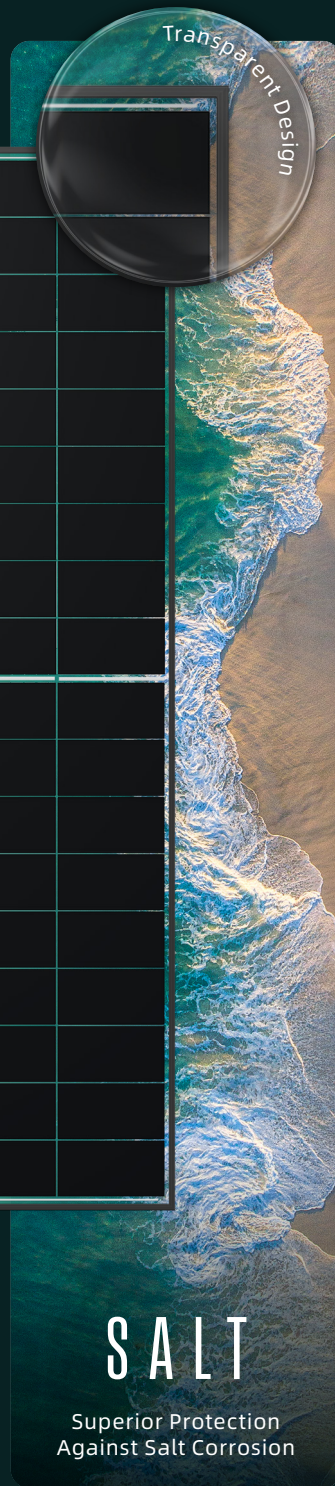

SALT

Superior Protection
Against Salt Corrosion




30 Year Product and 30 Year Performance Warranty*

Dual Glass - Back Contact


15
YEARS | Installing
in Australia and
New Zealand
phonosolar.com

Imagery for Illustrative Purposes Only


Panel Dimensions

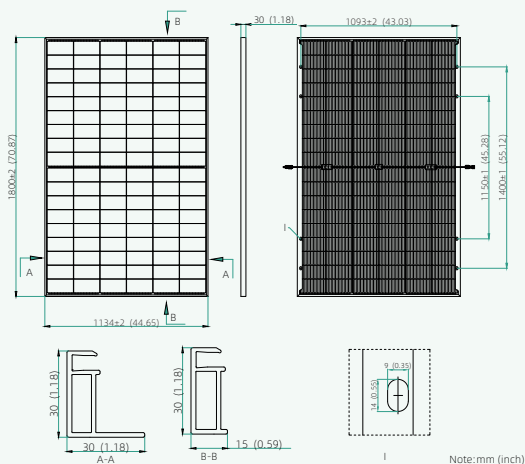


Clamping Zones

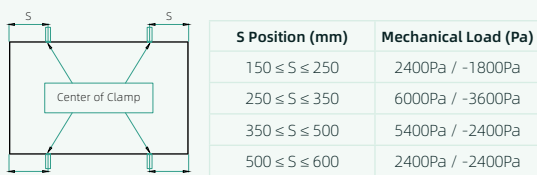

Electrical Characteristics

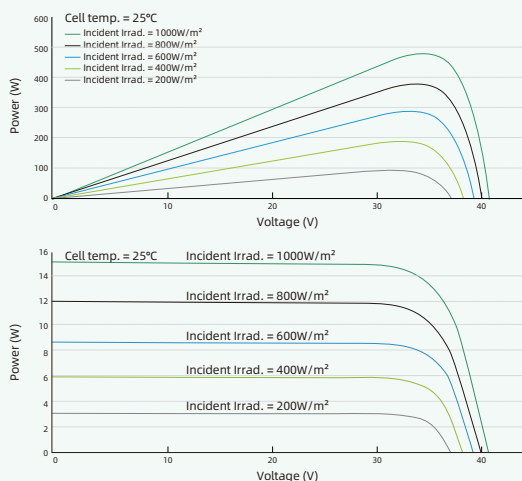

Linear Performance Warranty

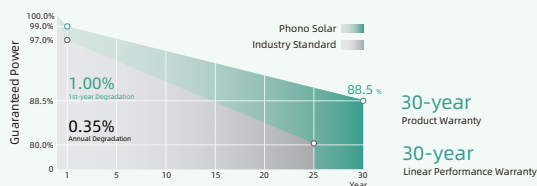

30-year linear performance warranty to 88.5% at year 30. This amounts to 1% degradation in the first year, 0.35% annually. | *30 year Product Warranty applies to Residential System Installations. Commercial System Installations are eligible for 25 year Product Warranty. Please see our warranty document for full terms, conditions and details.

PHONO SOLAR TECHNOLOGY CO., LTD. reserves the right to make necessary adjustments to the information described herein at any time without further notice. The specifications and certificates contained in this datasheet may deviate slightly from our actual products due to the on-going innovation and product enhancement. Please be sure to use the most recent version of data.

Manufactured In China
Engineered for Australia and New Zealand



Electrical Typical Values

Model	PS475L7GFH-18/VBH	
Testing Condition	STC	NOCT
Rated Power (Pmpp)	475	361
Rated Current (Impp)	14.31	11.47
Rated Voltage (Vmpp)	33.20	31.47
Short Circuit Current (Isc)	15.01	12.06
Open Circuit Voltage (Voc)	40.11	37.93
Module Efficiency (%)	23.27	

STC(Standard Testing Conditions): Irradiance 1000W/m², AM 1.5, Cell Temperature 25°C. NOCT (Nominal Operation Cell Temperature): Irradiance 800W/m², Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s. Made in China. Measurement Tolerance at STC: Pmax±3%, Voc±5% and Isc±5%.

BNPI

Maximum Power (Pmax)	520
Optimum Operating Current (Impp)	15.67
Optimum Operating Voltage (Vmpp)	33.2
Short Circuit Current (Isc)	16.44
Open Circuit Voltage (Voc)	40.11

BNPI:Front side irradiation 1000W/m², back side reflection irradiation 135W/m², AM 1.5, ambient temperature 2°C, ϕPmax: 70%±5%; ϕVoc:98%±5%; ϕIsc:70%±5%. Measurement Tolerance: Pmax±3%, Voc±5% and Isc±5%

Mechanical Characteristics

Cell Type	N Type BC
Dimensions	Length: 1800mm Width: 1134mm Height: 30mm
Weight	23.5kg
Front Glass	2.0mm Heat Strengthened Glass
Back Glass	1.6mm Heat Strengthened Glass
Frame	Anodised Aluminium Alloy
Cable (Including Connector)	1200mm
Junction Box	IP 68 Rated
Connectors	Staubli EVQ2

Temperature Ratings

Voltage Temperature Coefficient	-0.20%/°C
Current Temperature Coefficient	+0.05%/°C
Power Temperature Coefficient	-0.26%/°C
Power Tolerance	0~+5W
NOCT	45±2°C
PV Module 98th percentile operating temperature	70°C

Absolute Maximum Rating

Operating Temperature	From -40 to +85°C
Salt Mist Certification	Level 6
Hail Diameter @ 97.9km/h	Up to 35mm
Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Maximum Series Fuse Rating	30A
PV Module Classification	II
Fire Rating (IEC61730)	C
Maximum System Voltage	DC 1500V

Packing Configuration



1820 mm



1120 mm



1245 mm



36 Modules



900kg



24 Pallets